




Product Notice

Practical solutions...at *every* level!

NOW AVAILABLE!

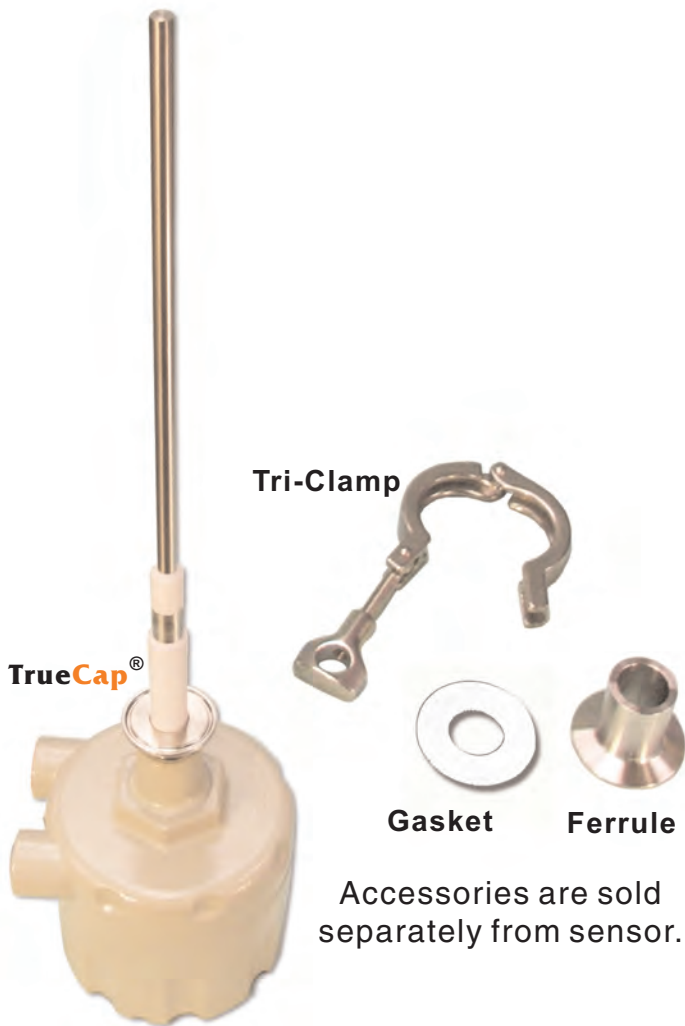

Tri-Clamp

Gasket

Ferrule

Accessories are sold separately from sensor.

QUICK-CONNECT TRI-CLAMP Process Connection for TrueCap® RF Capacitance Level Sensors

- ▼ Quick connect and disconnect...Provides easy installation and easy removal of the TrueCap® unit for cleaning purposes.
- ▼ Affordable solution for general sanitation situations not requiring 3-A® Rating.
- ▼ No exposed threads.
- ▼ Available for Monitor's TrueCap® MK-2 and MK-2e RF Capacitance level sensors. (integral and remote configurations; ordinary location only.)
- ▼ Available for Ryton® and Nylon (food grade) versions of the standard and stub probes.

- ▼ Accommodates both a 1" and 1-1/2" ferrule size.
- ▼ Clamp and ferrule are stainless steel construction. Gasket is constructed of Viton®.

▼ **Accessories listed below are ordered as separate items in addition to the TrueCap® sensor.**

Part #	Description
11-3017	Tri-Clamp, 304 SS
11-3007	Ferrule for Tri-Clamp, 316 SS, 1"
11-2007	Gasket for Tri-Clamp, Viton®

MONITOR TECHNOLOGIES, LLC

44W320 Keslinger Road ▼ Elburn, IL 60119

Tel 630-365-9403 ▼ Toll-Free 800-766-6486(US/CA) ▼ Fax 630-365-5646

www.monitortech.com ▼ www.monitortech.typepad.com ▼ monitor@monitortech.com

www.monitortech.com